


# Rotofast


## alimentatore per alluminio e ottone

### automatic metal loader for aluminium and brass

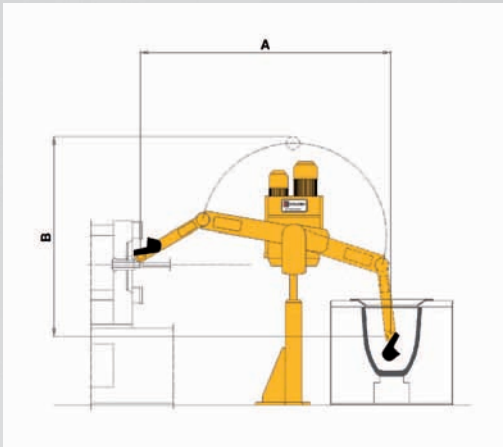


| MODELLO<br>MODEL | CAPACITA' TAZZE<br>CUPS CAPACITY | TOLLERANZA DI<br>DOSAGGIO<br>BATCHING TOLERANCE | CICLI A VUOTO<br>CYCLES (FREE) | POTENZA ASSORBITA<br>POWER CONSUMPTION | DIMENSIONI MAX<br>DIMENSIONS MAX |
|------------------|----------------------------------|-------------------------------------------------|--------------------------------|----------------------------------------|----------------------------------|
|                  | Kg                               | %                                               | n/h                            | Kw                                     | A mm B mm                        |
| ROTOFAST AL      | 0,1 ÷ 3,8                        | ± 1                                             | ~ 400                          | ~ 1                                    | 1850 1850                        |
| ROTOFAST OT      | 0,5 ÷ 8                          | ± 1                                             | ~ 360                          | ~ 1                                    | 950 950                          |

*Rotative metal loader for extremely quick working cycles and reduced weights.*  
**Aluminum version and brass version** with cup cleaning cutter. Precision, reliability and constancy accompanying towards the future.

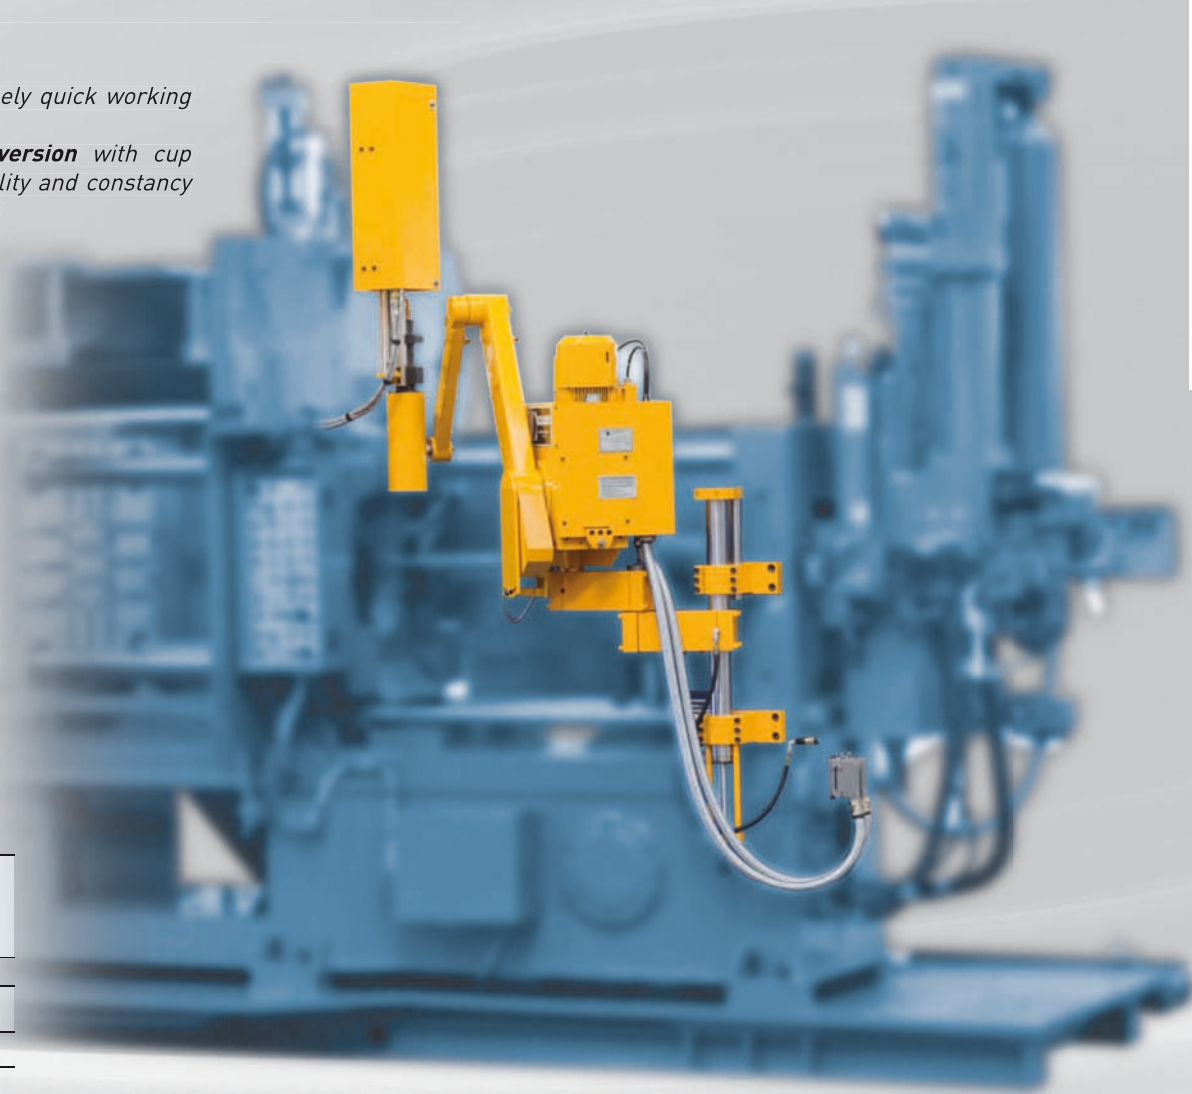


Alimentatore metallo trasversale applicabile su ogni macchina di pressocolata, a colonna o su pratico supporto iniezione. Grandi risultati con estrema semplicità: quando l'esperienza insegna!

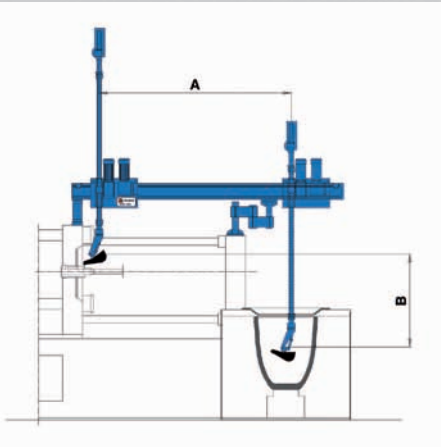

| MODELLO<br>MODEL | CAPACITA' TAZZE<br>CUPS CAPACITY | TOLLERANZA DI<br>DOSAGGIO<br>BATCHING TOLERANCE | CICLI A VUOTO<br>CYCLES (FREE) | POTENZA ASSORBITA<br>POWER CONSUMPTION | DIMENSIONI MAX<br>DIMENSIONS MAX |
|------------------|----------------------------------|-------------------------------------------------|--------------------------------|----------------------------------------|----------------------------------|
|                  | Kg                               | %                                               | n/h                            | Kw                                     | A mm B mm                        |
| TRANSAL          | 0,1 ÷ 25                         | ± 1                                             | ~ 210                          | ~ 1,5                                  | 2800 1250                        |

*Automatic transversal metal loader applicable on every diecasting machine, on a column or with a practical injection support.*  
*Great results with extreme simplicity: when the experience shows!*

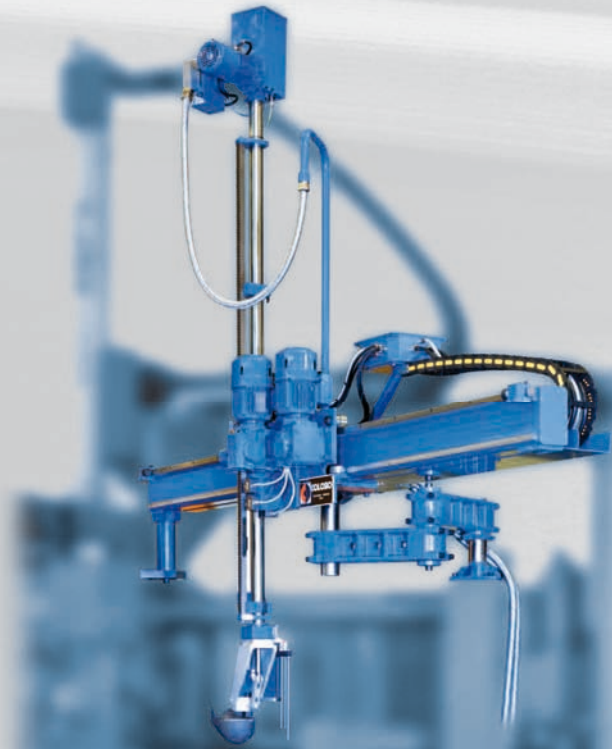

# Transal

## alimentatore per alluminio

### automatic metal loader for aluminium